

Par-ky®
friendly floors

HOME is not a place....
it's a FEELING



ENDLESS INSPIRATION from page 4

- | | |
|-----------------------|-------|
| Pattern floors..... | 04-09 |
| Pure oaks | 10-19 |
| Rustic oaks | 20-29 |
| Character woods | 30-39 |

4 collections
from modern
to rustic



With great
trend tips

Par-ky floors, with a
top layer in real wood,
are produced in Belgium
with the utmost care.



Together we CHOOSE the FLOORING that suits you best

There's no accounting for taste. We all have our own ideas about **trends and colours**, and that's what makes us so unique. We also often have different tastes when it comes to choosing our **interior**, but thanks to our huge range there's something for everyone. Beside the choice from **21 colours**, there are also **different sizes and styles** such as pattern floors, pure or rustic floors in oak and for those who dare, the distinctive floors with exotic wood species. Due to the extensive range, Par-ky fits in with any interior, from a rural home to a modern house.

This brochure is set to take you on a journey of discovery. Be inspired by our wealth of interior tips and discover a '**friendly floor**' that suits you perfectly!

*Choose from
21 colours*

you will find an overview
on page **43**

all technical
information
from page

40





PATTERN FLOORS *trendier than ever before*

These wonderful pattern floors might have been around for years, but they're **trendier than ever**. Don't be misled, this trend never goes away. Patterns provide a **unique touch** to your interior, and suit both traditional homes such as town houses, and ultra-modern interiors. Choose from our **Twist collection**, ideal for large spaces, or our **brand-new Swing** also lending itself perfectly to smaller surfaces. What's more, both collections are available in various **colours and wood species**, meaning you're guaranteed to find a flooring that harmonises with your interior.

GEOMETRY - CLASS - AUTHENTIC - STYLISH



Swing 06

DESERT OAK



Create charm with *natural* tones

Put together your colour palette and decide which **tones** fit in with your interior. Coordinate your flooring with your design, that way ensuring an interior **exuding** peace and harmony. The natural tones of wood flooring create an unparalleled **warmth** and **charm**.



Can also be laid in
*double
herringbone*

NEW
2018

Swing 06 IVORY OAK

Three circular color swatches are positioned above the main image: a tan/brown circle on the left, a light gray circle in the center, and a dark charcoal/black circle on the right.

A close-up inset in the bottom right corner shows a person's feet wearing flip-flops standing on the light-colored wood floor.



Twist+ 06

SMOKED WALNUT

Choose from 5 colours
in 2 board formats




Pattern floors are the latest trend in interior design, and Par-ky responds to this with its innovative veneer floors. We combine unique patterns in real wood, with the easy installation of laminate floors. Our Twist+ collection, with integrated cork layer, can be fitted in a single or double herringbone and even in squares, thanks to the Uniclic® system.

Our brand-new Swing which, with its smaller size, is also ideal for smaller spaces, makes installing even easier thanks to the fold-down click-system Unifit X®.

The pattern calculator helps you simplify calculating and installing both pattern floors (patterns.par-ky.com). You will find laying instructions at www.par-ky.be/en/downloads.

PATTERN FLOORS

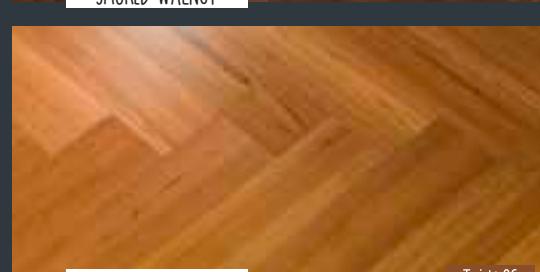



NEW
2018

Deluxe+ 06

CLIFFSIDE OAK



PURE OAKS

*Beauty in its
purest form*

If you want to enjoy the most **beautiful wood**, opt for this pure oak. The focus here is on pure, neat quality, without any rustic knots.

The thinner the top layer, the purer the wood, and thus our veneer floor with a 0.6 mm top layer is our greatest asset. This **PREMIUM** quality provides you all the beauty nature has to offer!

If you're looking for a floor with a thicker top layer of 2 mm without knots, then the **SELECT** is definitely something for you.

You will find more information on qualities on pages 44-45.

BRIGHT - CALM - NEAT - TIMELESS - BEAUTIFUL



Classic 20


IVORY OAK



Large, small, wide or narrow?

The size of the space determines the size of the floor boards. For **smaller spaces** it is best to choose short, narrow boards. In **large spaces**, long and wide boards really come into their own. The direction of the floor boards also have an influence. Long boards in a room's length direction make this space seem even longer. Thanks to the **9 different floorboard sizes**, Par-ky offer a solution for any interior. More information on p 47.



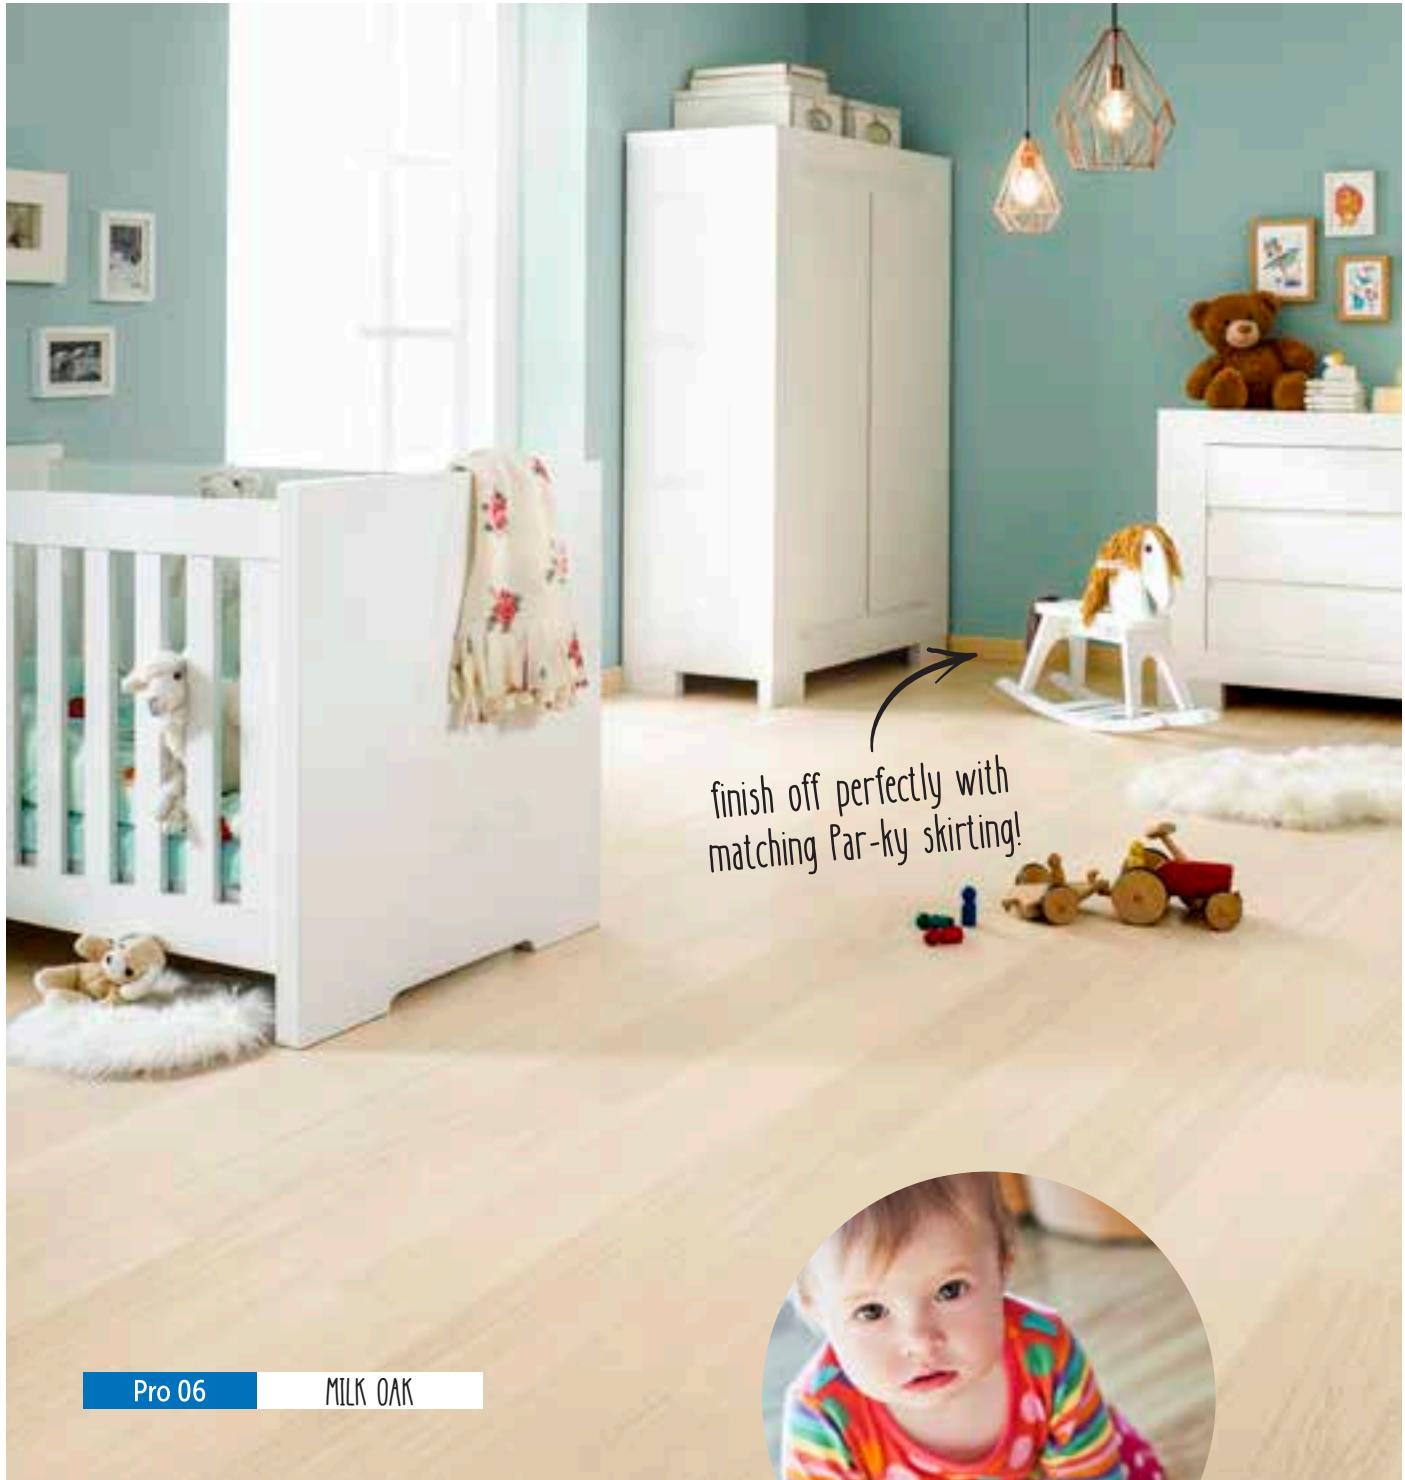

Tips for the baby's room

1. Opt for soft tones to calm your baby. A flooring with a light colour such as Milk Oak in combination with an accent wall is currently on-trend, and form a beautiful combination.

2. Real wood provides extra warmth and cosiness. Thanks to the top layer in real wood, Par-ky is an ideal flooring for the baby's room.

3. Maintenance-friendly and hygienic. Par-ky is finished off with eight layers of varnish and the V-grooves are provided with the antibacterial protection 'Ultrafresh' and the Aqua Sealing Complete technology. This means the wood is well protected against any little accidents, and our specially developed Park-ky Cleaner makes maintenance child's play.



WHITE is always CALMING



Deluxe+ 06

CRYSTAL OAK



felt on the legs help protect
your wood flooring even better.



Deluxe+ 06

CANYON OAK

In harmony with nature

With a **harmonious interior**, it is vitally important that all of the elements in the space coordinate together. That's why you should really think about the **use of colour** and adding furniture and accessories. Try to stick with the style you had in mind when starting your **design**. Remain with a certain colour scheme, and continue with the design based on this. Thanks to Par-ky's **extensive colour range**, you're sure to find a floor that suits your style.



the white pores of the cerused wood
make this Canyon Oak a real Supreme Oak




Lounge 06


ANTIQUE OAK

PURE OAKS

Trendy Oaks

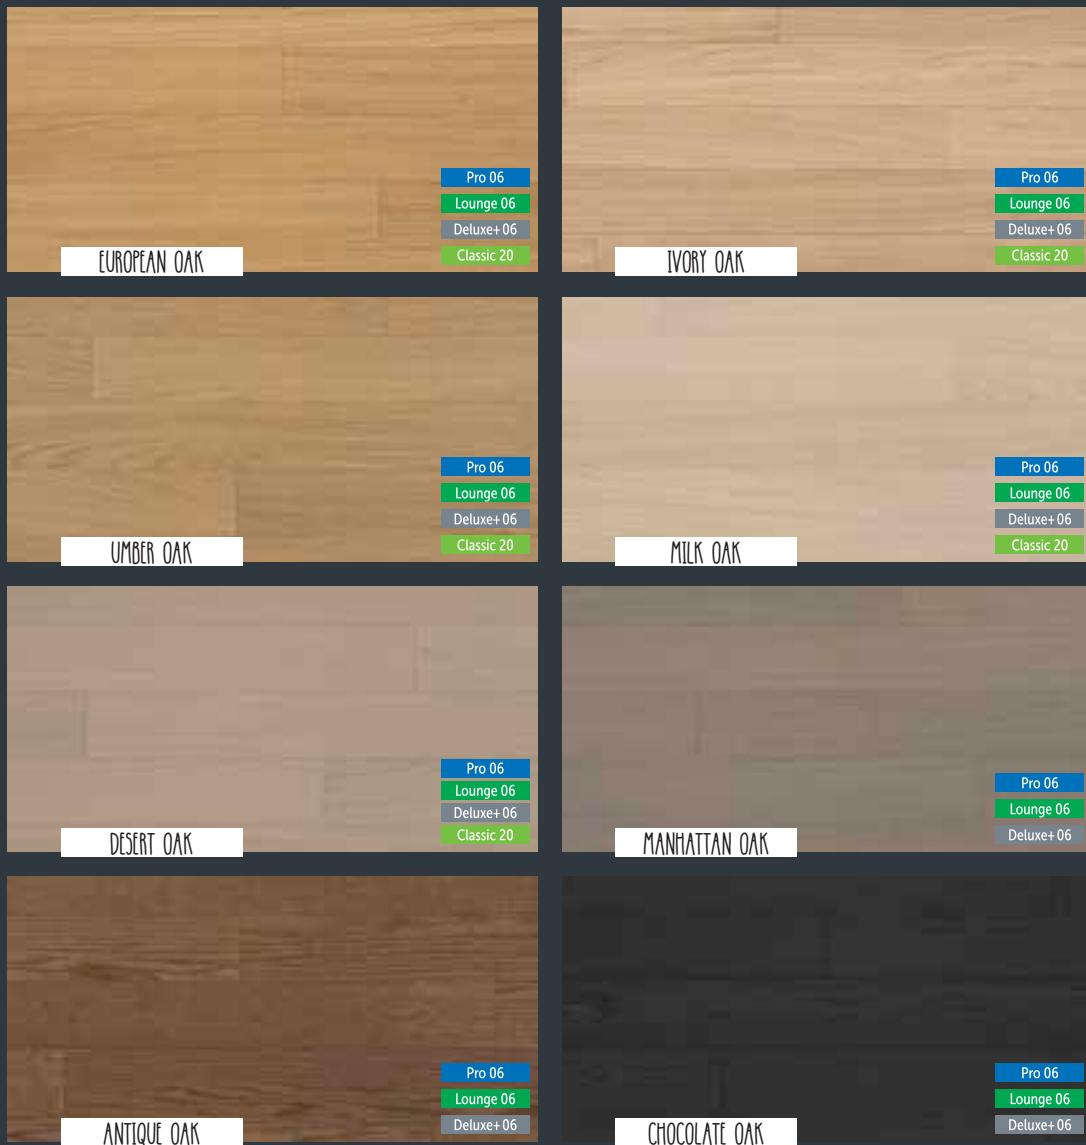

Supreme Oaks

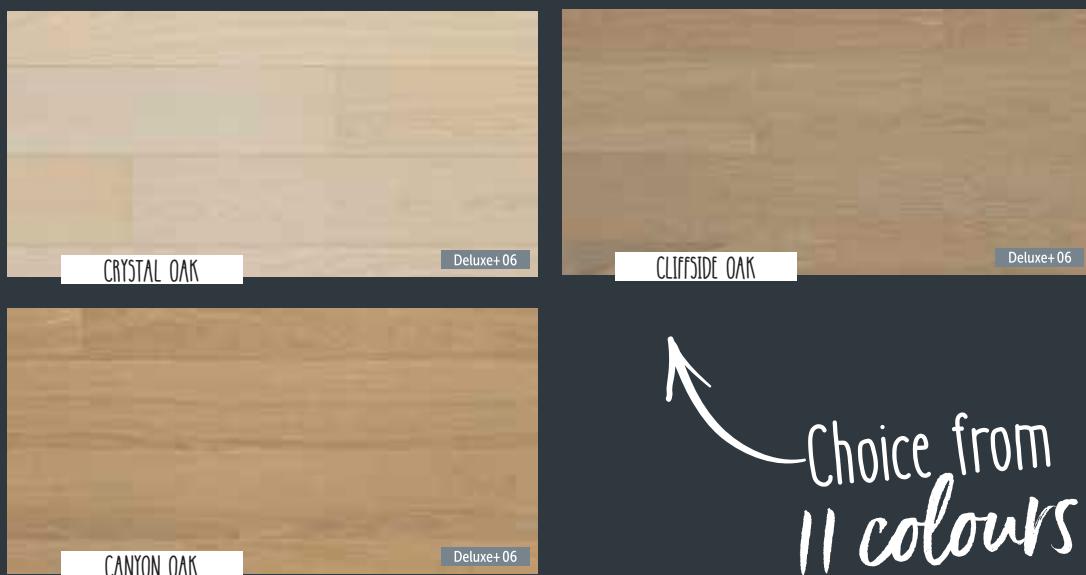



RUSTIC OAKS *bring nature*

Rustic oak floors are loved for their dazzling character and timeless appearance. Knots, clusters, dark grains... these are just a few of the natural features that come into their own in these floors. The rustic oaks come in two varieties: **rustic light** is somewhat calmer and displays fewer pronounced natural features, while the **rustic intense** provides a genuine rural character and reflects the wood in all its glory.

You will find more information on our rustic floors on page 45.

Rustic floors suit not only cottages, but are nowadays also combined with a modern interior.

CHARMING - VIBRANT - SPECIAL - STRIKING - NATURAL



Aged flooring with open knots provides a lot more structure and character



Deluxe+ 06

HISTORY OAK



A teenager's room is a space for living, studying and playing, making the choice of interior and flooring extremely important. The room has to be functional and the flooring must also be able to resist an impact. Since the room is used so frequently, something might now and then break or come crashing to the floor. Par-ky also has a solution for this. Minor scratches can easily be repaired using **Par-ky repair pens**. These pens have been developed for each reference, and contain both colour and lacquer. You can eliminate the scratch with the colour pen, and the lacquer ensures the scratch is covered up. That way you prevent dirt from penetrating, and the flooring keeps its original beauty for even longer. That means your teenager can enjoy their room for longer. Find out more on page 53.

There's **NOTHING** greater
than being a **TEENAGER**






Tips for your dressing room

Dressing rooms are becoming increasingly popular. A walk-in dressing room is than a storage space for your clothes, and besides a well-functioning space, it's also important to create a pleasant atmosphere. So here are a few tips.

- 1. Opt for a warm floor**, where you can walk in bare feet. Par-ky has a top layer in real wood, and thus lends itself perfectly to this space.
- 2. Don't choose overbearing colours**, these won't bring out the best in your clothes. With Par-ky you can choose between 21 colours, so there's definitely something to suit your walk-in wardrobe.
- 3. A dressing room also has to be maintenance friendly** so that you can easily remove dust. Maintenance is child's play with Par-ky, thanks to the 8 strong varnish layers.
- 4. Don't forget about the finishing**. Opt for matching skirtings at the places where your wardrobes stop.
- 5. Choose natural daylight** and make the space seem bigger by using light colours and large mirrors.

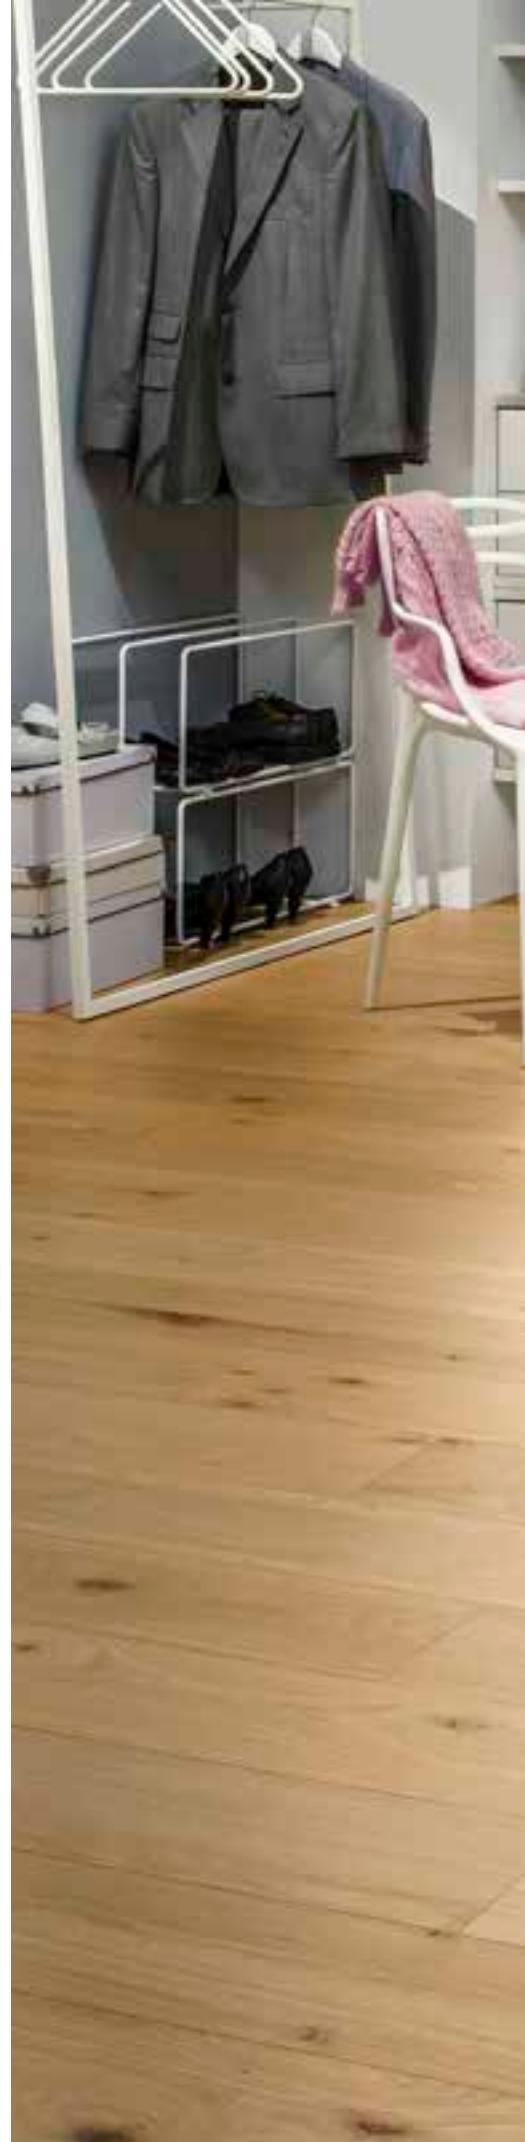




Pro 06

IVORY OAK



RUSTIC OAKS

Trendy Oaks

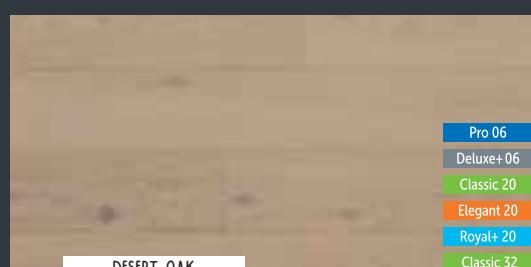

Choice from
6 colours

Supreme Oaks





CHARACTER WOODS

Although oak floors remain hugely popular, we're noticing that a lot of people are looking for alternatives. Each wood specie has its own **characteristic feature**, which provides **variation**. Our exotic floors are durable, ecological and of a high quality, and provide a **stylish, on-trend character** within your home. While exotic wood species are normally hugely expensive, Par-ky makes them **affordable**, since we only work with a thin top layer in wood, compared with the solid flooring.

Be enchanted...

FIERY - UNIQUE - PASSION - POWERFUL



Becoming one with nature
we can help on the way !





Perfect to use in combination
with underfloor heating.







Lounge 06 SHADOW MACASSAR

We can take a KNOCK

Par-ky flooring is ultra-strong, thanks to the HDF (high density fibreboard) in combination with the **8 ultrastrong layers of lacquer**. This makes Par-ky more resistant to impacts than solid parquet or engineered parquet with a core other than HDF, such as pine. Moreover, the **thickness of the top layer** also plays a part in the floor's strength. The thinner the wood, the better the floor can withstand impact. This is because the HDF directly beneath it has a higher density than any wood specie.



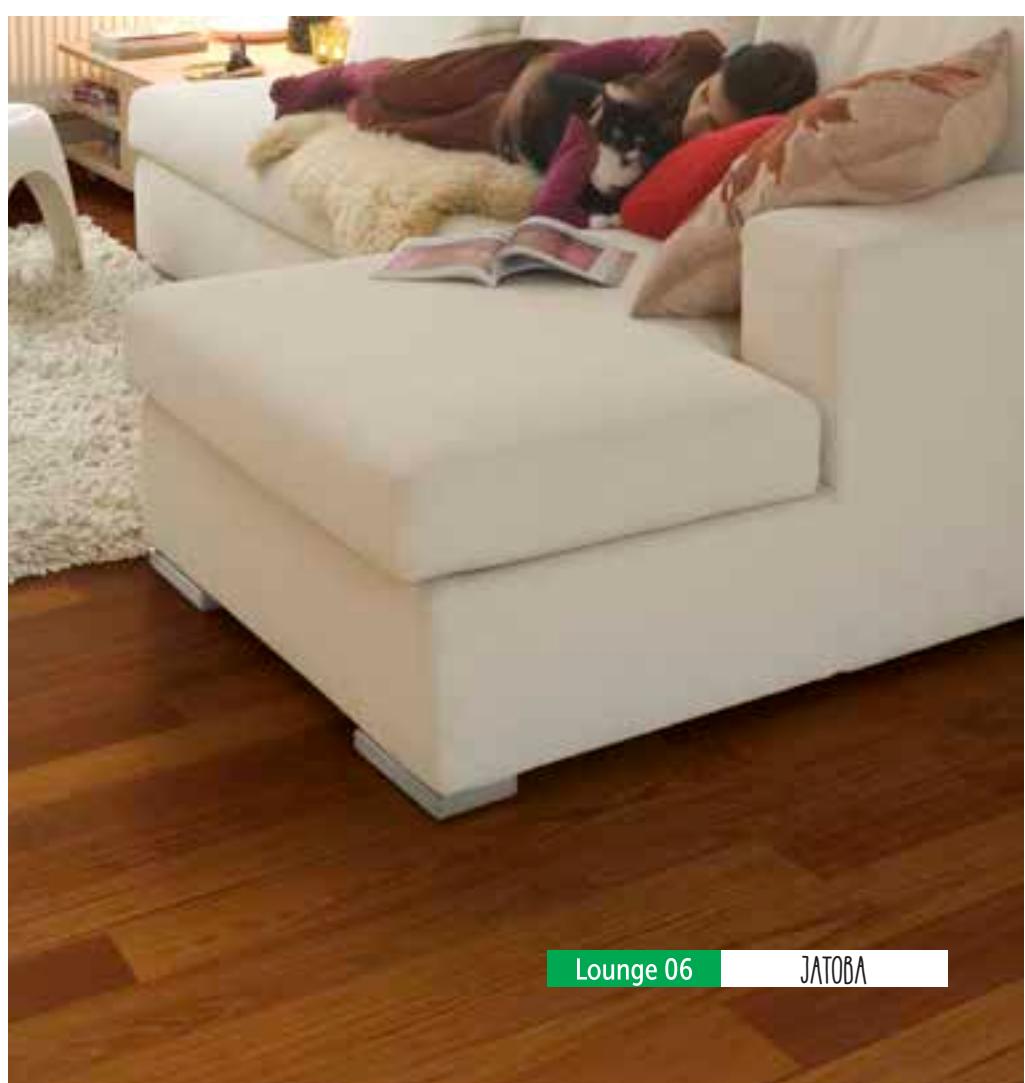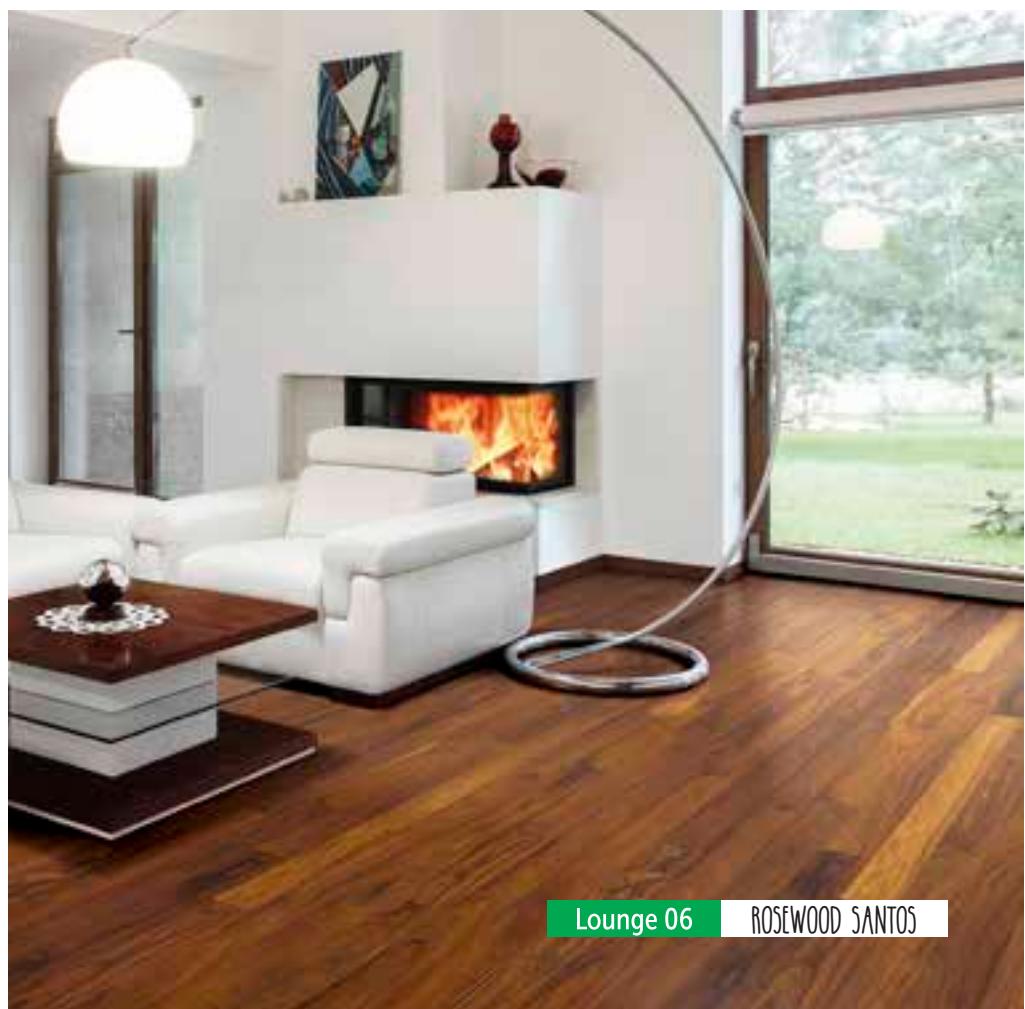



Sealed or Brushed?


The majority of the floors from the character woods collection have a sealed finish. With these, the wood pores are filled with varnish. This way, you obtain an extremely strong protective layer on the natural wood, making your floor resistant to moisture and dirt.

What's more, we are this year releasing an Afrormosia and a Smoked Walnut with 2 mm top layer, which we finish brushed. This brushed finish accentuates the natural structure of the wood, and allows the grain to stand out more. Moreover, these floors are given a mat coating, meaning the natural appearance is retained.

Smoked Walnut now also available
with a 2mm top layer,
in both select and rustic grade

Classic 20 SMOKED WALNUT

NEW 2018

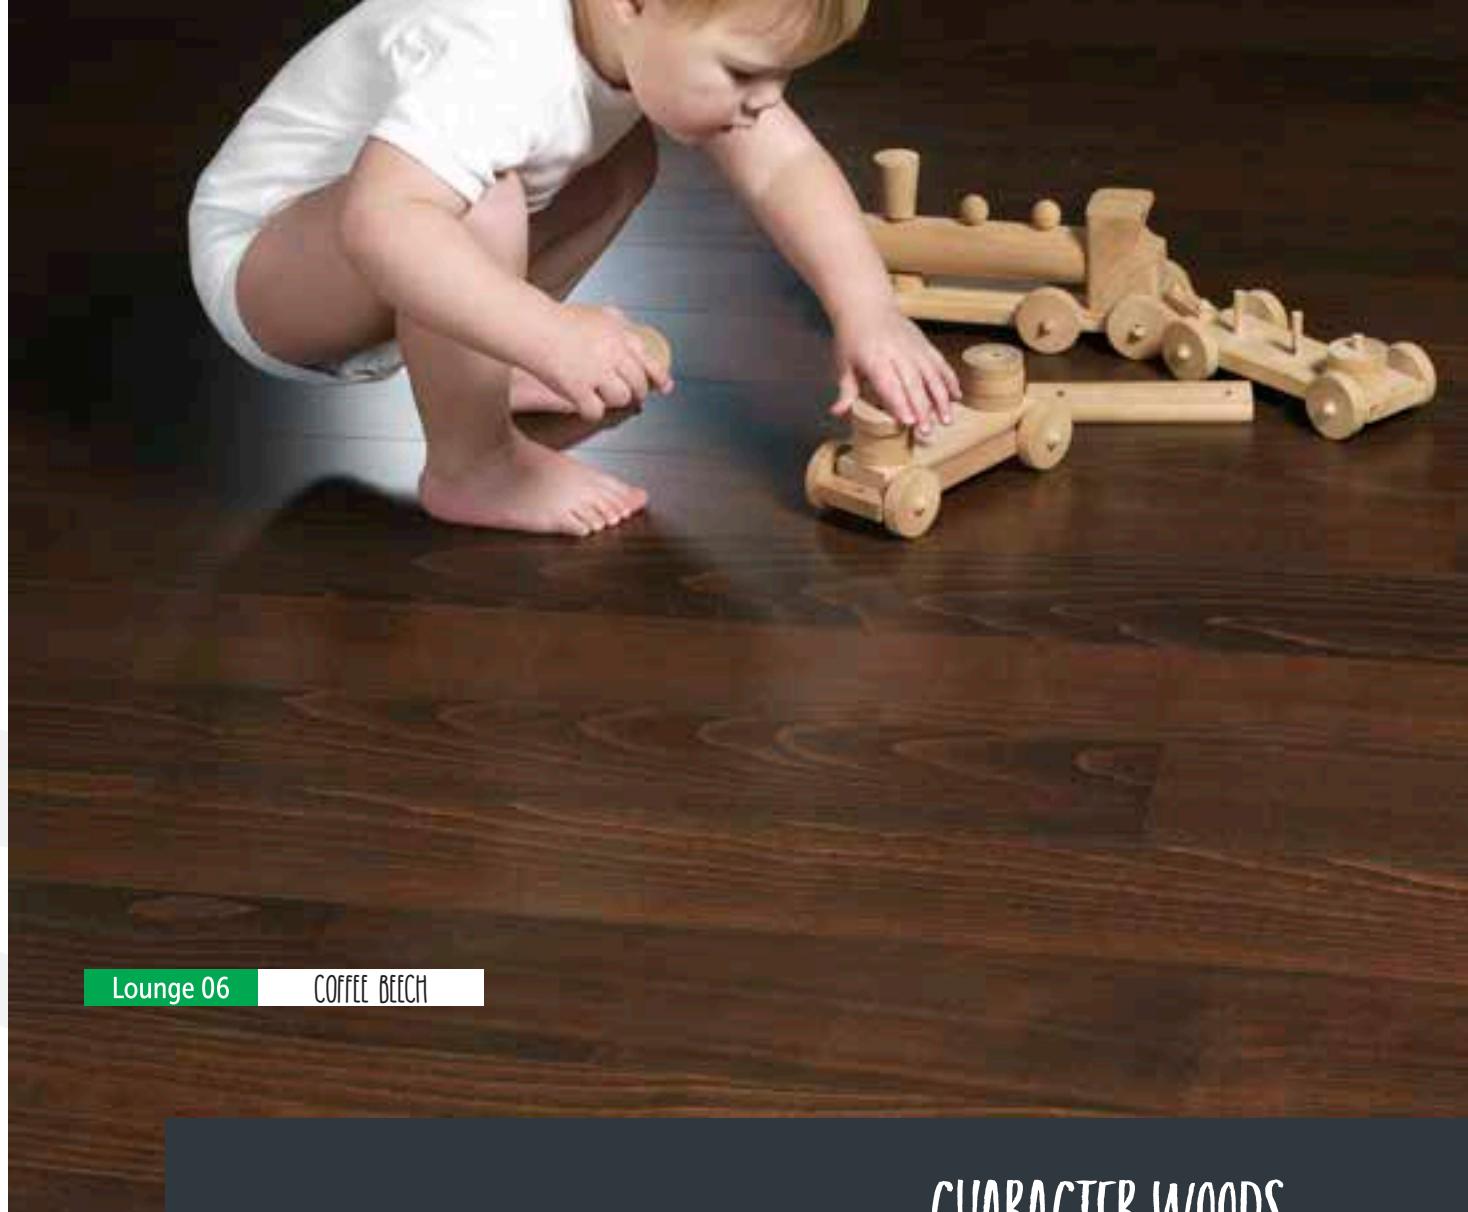

Lounge 06

COFFEE BEECH

Exclusive wood species



In solid parquet, these wood species are expensive and unstable.

In contrast, with its thin top layer Par-ky is able to offer a genuine wood flooring that's affordable, stable and long-lasting. If you like character, you're sure to find a flooring you'll fall for here.

CHARACTER WOODS



SMOKED WALNUT

Pro 06
Lounge 06
Deluxe+ 06
Classic 20



SUCUPIRA

Lounge 06




ROSEWOOD SANTOS

Lounge 06



Lounge 06

SUCUPIRA

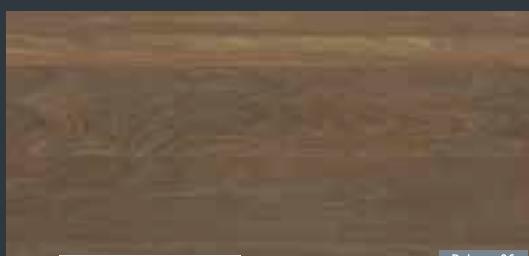

AFROMOSIA

Deluxe+06



COFFEE BEECH

Lounge 06




TEAK

Lounge 06



SHADOW MACASSAR

Lounge 06

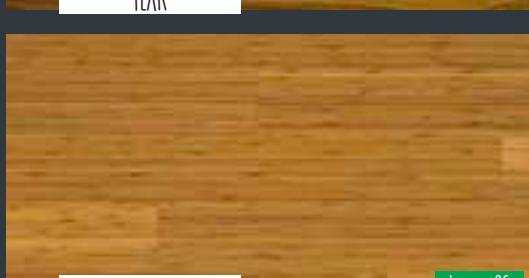

BAMBOO STEAMED

Lounge 06



JATOBÁ

Lounge 06

A sustainable choice

Par-ky loves wood, so we are very careful how we use this precious, natural resource. We optimise the use of this raw material by slicing it into very thin flitches instead of using thick lumber boards where most of the wood is underutilized. In addition, all our wood comes from sustainable forests.

Nearly one third of the energy that we need for the production of our floors is generated by our own solar panels. We also installed 2 wind turbines that provide us with extra sustainable energy. We also reduce our waste by collecting sawdust and wood chips which can be used as heating fuel during the cold months. Less waste, less fuel, fewer emissions. And there's more good news: we are aiming to be able to produce on a completely CO2-neutral basis by 2019!

Easy installation

With Par-ky, you enjoy all the practical benefits of laminate, without having laminate in your home. This is because our floors are equipped with the clever Uniclic® and Unifit X® system for a fast and easy installation.



Stronger than solid parquet

Par-ky is exceptionally resistant to impacts. The secret lies in its well thought-out structure. This is because Par-ky consists of an ultra-strong, High Density Fibreboard (or HDF), onto which the wood top layer is pressed with the DSI system (Double Sided Impregnation). During the pressing process, the glue is pressed into the wood as much as possible, until it is saturated. The top layer is then finished off with no less than 8 thick varnish layers, which are also absorbed by the wood and thus come into contact with the glue. In this way, the wood is entirely saturated and becomes extremely strong when setting. Thanks to this structure, our floors are exceptionally resistant to impacts, and are stronger and more stable than solid parquet.



Hygienic

Thanks to the Aqua Sealing Complete system, the V-grooves are coloured in and lacquered over, protecting from moisture.

The V-groove is also provided with "Ultrafresh" antibacterial protection. This means that bacteria will not settle there, and so your floor remains not only clean, but also hygienic.

Be sure also to see our adapted cleaners for maintaining your Par-ky flooring effectively and easily.



Real wood

Every Par-ky board is finished off with a top layer in **real wood**. This means you get a floor that looks like a solid floor, although at affordable prices. Since we use real wood, with Par-ky – just like in nature – you won't find **two identical boards**. What's more, the wood also feels pleasantly **warm**.

*That's why
you choose PAR-KY !*

Par-ky floors guarantee healthy air quality

To finish off our floor boards, we only use water-base stains, glues without VOC (Volatile Organic Compounds) and lacquer with a minimum of harmful solvents. This makes it scientifically proven that air quality is better where a Par-ky is fitted. The HDF layer (High Density Fibreboard) in the middle of our boards is of the **highest quality**. This is why our floors achieve the quality label A, and certain collections even an A+.





CHOOSE the colour
that SUITS you best!



Trendy Oaks



On this page you will find an overview of all of the colours. You will find more information on which colour is possible with which style, floorboard size or top layer on page 48-49.

Supreme Oaks



Character Woods







For us, PURCHASING oak responsibly isn't a trend, but has been part of our DNA from the beginning.

For purchasing high-quality wood, our buyers are constantly on the lookout for the best suppliers, to guarantee each floorboard produced meets our strict requirements. Our Pure Wood charter furthermore guarantees that all of the wood originates from sustainably managed forests. Various aesthetic qualities are possible in our Trendy Oaks range, depending on the thickness of the top layer.

PURE OAKS	
PREMIUM	SELECT
For the 'Premium' grade, only the purest veneer wood of 0.6 mm is used. These top layers are of an exceptionally pure quality, providing the most beauty nature has to offer.	A 2 mm top layer means a select quality: somewhat more natural features of wood, a wonderful blend of structures, more pronounced wood grains, etc.
	
top layer 0.6 mm	top layer 2 mm

Trendy Oaks

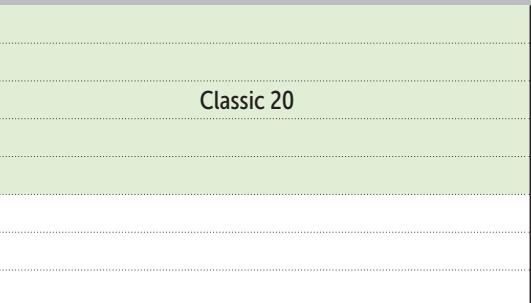EUROPEAN OAK				
IVORY OAK				
UMBER OAK	Pro 06	Lounge 06	Deluxe+06	Classic 20
MILK OAK				
DESERT OAK				
MANHATTAN OAK				
ANTIQUE OAK				
CHOCOLATE OAK				

Supreme Oaks

CRYSTAL OAK				
CLIFFSIDE OAK				
CANYON OAK				
HISTORY OAK				

RUSTIC OAKS

RUSTIC LIGHT

Rustic light is a rustic wood flooring with smaller and larger knots complementing each other perfectly.

RUSTIC INTENSE

With this intense rustic floor you bring nature indoors: the knots and the natural character of the wood are striking. The history oak goes even one step further. Its open knots and cracks result in a character truly intense and marked with age.



top layer
0.6 mm

top layer
2 mm

top layer
3.2 mm

top layer
0.6 mm

top layer
2 mm

top layer
3.2 mm

Pre-06

Deluxe | 06

Classic 20

Elegant 30

Revolution 20

Classic 32

Classic 2

Elegant 2

Royal 2

Classic 32

Deluxe+06



Long, wide board ideal
for large spaces

the PRO board is
the ultimate
alternative to
laminat:
wood at the price
of laminate



new SWING floorboard
with Unifit X® click

On this page you will find an overview of all of the dimensions and top layers for both the board floors and the pattern floors. You will find an overview of which colour and style corresponds with which floorboard on page 48-49.

7 board floors

Top layer 0.6 mm



Pro 06



Length 1203 mm (47.4 inch) - Width 190 mm (7.5 inch) - Thickness 7.2 mm (1/4 inch)

Lounge 06



Length 1203 mm (47.4 inch) - Width 124 mm (5 inch) - Thickness 8.3 mm (3/8 inch)

Deluxe+06



Length 1800 mm (70.9 inch) - Width 166 mm (6.5 inch) - Thickness 12 mm (1/2 inch)

Top layer 2 mm



Classic 20



Length 1185 mm (46.7 inch) - Width 150 mm (6 inch) - Thickness 10 mm (3/8 inch)

Elegant 20



Length 1935 mm (76.2 inch) - Width 150 mm (6 inch) - Thickness 10 mm (3/8 inch)

Royal+ 20



Length 1935 mm (76.2 inch) - Width 194 mm (7.6 inch) - Thickness 12 mm (1/2 inch)

Top layer 3.2 mm



Classic 32



Length 1184 mm (46.7 inch) - Width 148 mm (6 inch) - Thickness 14 mm (9/16 inch)

2 pattern floors

Top layer 0.6 mm



New! Fold-down possible with Unifit X®
30% time gain when installing

Top layer 0.6 mm



Swing 06



Length 595 mm (23.4 inch) - Width 121 mm (4.8 inch) - Thickness 10 mm (3/8 inch)

Twist+ 06



Length 868.7 mm (34.2 inch) - Width 124.1 mm (5 inch) - Thickness 12 mm (1/2 inch)

Calculate the space
patterns.par-ky.com



HERRINGBONE




Swing 06 ✓ Twist+ 06 ✓

DOUBLE HERRINGBONE




Swing 06 ✓ Twist+ 06 ✓

SQUARE



Swing 06 ✗ Twist+ 06 ✓

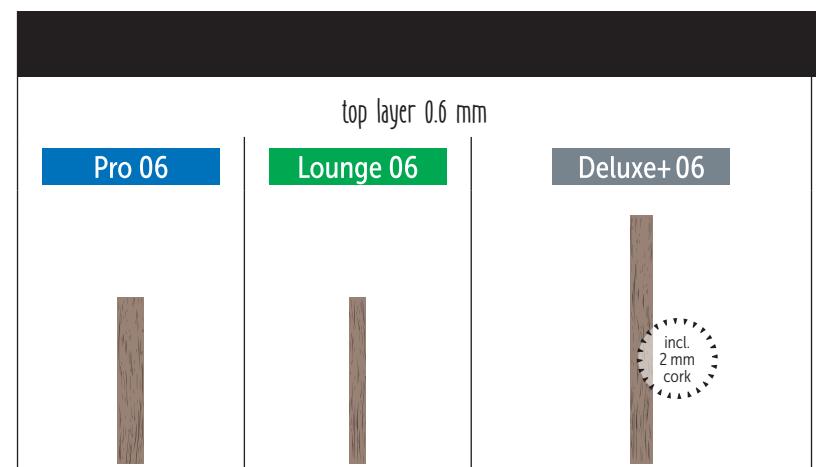

	FLOOR BOARD	Dimensions	1203 x 190 mm (47.4 x 7.5 inch)	1203 x 124 mm (47.4 x 5 inch)	1800 x 166 mm (70.9 x 6.5 inch)
	BOX	Thickness	7.2 mm (1/4 inch)	8.3 mm (5/8 inch)	12 mm (1/2 inch)
		Click system	Uniclic®	Uniclic®	Uniclic®
		# boards	11 boards	11 boards	7 boards
		Surface	2,514 m ² (27 sq.ft)	1,641 m ² (18 sq.ft)	2,092 m ² (23 sq.ft)
FINISH	BEVEL	Maxi ± 15 mm	-	-	2
		Mini ± 0.5 mm	4	2	2
		Micro ± 0.1 mm	-	2	-
	GLOSS	Matt (10)	Satin (20)	Matt (10)	Satin (20)
STRUCTURE	Brushed	Sealed	Brushed	Sealed	Brushed
					Sealed

Trendy Oaks

EUROPEAN OAK	PURE	Premium	PB101		LB101		DB+101	
		Select						
	RUSTIC	Rustic Light	PB135					
		Rustic Intense						
IVORY OAK	PURE	Premium	PB102		LB102		DB+102	
		Select						
	RUSTIC	Rustic Light	PB110				DB+110	
		Rustic Intense						
UMBER OAK	PURE	Premium	PB134		LB134		DB+134	
		Select						
	RUSTIC	Rustic Light	PB136				DB+136	
		Rustic Intense						
MILK OAK	PURE	Premium	PB103		LB103		DB+103	
		Select						
	RUSTIC	Rustic Light	PB137				DB+137	
		Rustic Intense						
DESERT OAK	PURE	Premium	PB104		LB104		DB+104	
		Select						
	RUSTIC	Rustic Light	PB116				DB+116	
		Rustic Intense						
MANHATTAN OAK	PURE	Premium	PB113		LB113		DB+113	
ANTIQUE OAK	PURE	Premium	PB106		LB106		DB+106	
CHOCOLATE OAK	PURE	Premium	PB108		LB108		DB+108	

Supreme Oaks



CRYSTAL OAK	PURE	Premium					DB+170	
CLIFFSIDE OAK	PURE	Premium					DB+171	
CANYON OAK	PURE	Premium					DB+172	
HISTORY OAK	RUSTIC	Rustic Intense*						DB+173

Character Woods

SMOKED WALNUT	Premium		PS203		LS203			DS+203
	Select	NEW 2018						
	Rustic							
AFRORMOSIA						DB+314		
COFFEE BEECH					LS204			
SUCUPIRA					LS303			
TEAK					LS304			
SHADOW MACASSAR					LS305			
ROSEWOOD SANTOS					LS306			
BAMBOO STEAMED					LS307			
JATOBÁ					LS308			

*only domestic usage (EN685 class 23)

BOARDS

top layer 2 mm

Classic 20

Elegant 20

Royal+ 20

1185 x 150 mm
(46.7 x 6 inch)10 mm
(5/8 inch)

Uniclic®

9 boards

1,600 m²
(17 sq.ft)

-

2

-

Matt (10)

Brushed

1935 x 150 mm
(76.2 x 6 inch)10 mm
(5/8 inch)

Uniclic®

7 boards

2,032 m²
(22 sq.ft)

-

2

-

Matt (10)

Brushed

1935 x 194 mm
(76.2 x 7.6 inch)12 mm
(1/2 inch)

Uniclic®

6 boards

2,252 m²
(24 sq.ft)

-

2

-

Matt (10)

Brushed

top layer 3.2 mm

Classic 32

1184 x 148 mm
(46.7 x 6 inch)14 mm
(9/16 inch)

Uniclic®

7 boards

1,227 m²
(13 sq.ft)

-

2

-

Matt (10)

Brushed

PATTERN

top layer 0.6 mm

Swing 06

595 x 121 mm
(23.4 x 4.8 inch)10 mm
(5/8 inch)

Unifit X®

11 boards

0.792 m²
(8.5 sq.ft)

-

4

-

Matt (10)

Brushed

Twist+ 06

868,7 x 124,1 mm
(34.2 x 5 inch)12 mm
(1/2 inch)

Uniclic®

9 boards

0.970 m²
(10 sq.ft)

-

4

-

Satin (20)

Sealed

C20S101

C20RL101

C20RI101

C20S102

C20RL102

C20RI102

C20S134

C20RL134

C20RI134

C20S103

C20RL103

C20RI103

C20S104

C20RL104

C20RI104

E20RL101

R+20RL101

E20RI101

E20RL102

R+20RL102

E20RI102

E20RL134

R+20RL134

E20RI134

E20RL103

R+20RL103

E20RI103

E20RL104

R+20RL104

E20RI104

C32RL101

C32RI101

C32RL102

C32RI102

C32RL134

C32RI134

C32RL103

C32RI103

C32RL104

C32RI104

SWB101

TB+101

SWB102

TB+102

SWB104

TB+104

C20S203

C20R203

"DO IT YOURSELF" installation has never been so EASY



Installation instructions can be found on each package,
at www.par-ky.com/en/Downloads or
by scanning the code with your smartphone.





Installation set

Installing Par-ky is really very easy. With our installation kit you have all the tools you need to install your Par-ky floor quickly and without damaging it: spacers to create expansion joints, pull bar and tapping block.



Which underlay should I choose ?



Use the Par-ky damp-proof foil (150 micron) for floors with an integrated cork layer. To prevent subfloor dampness damaging your floor, seal the edges together with Par-ky waterproof tape.

for use with

Deluxe+ 06 Royal+ 20 Twist+ 06



25 m²
(269 sq/ft)
per pack



A SOUND-INSULATING SOLUTION:

Par-ky aluminium underlayment (3.6 mm - 9/64 inch) reduces reflected noise and levels minor dips in the subfloor. Always lay with the aluminium side up and seal the edges together with waterproof tape. This prevents substrate dampness damaging the floor.

for use with

Pro 06 Lounge 06 Classic 20 Elegant 20 Classic 32 Swing 06



15.07 m²
(162 sq/ft)
Roll



A STANDARD solution:

The standard underlayment (2 mm - 5/64 inch) consists of foam and plastic. The integrated plastic prevents dampness from the substrate damaging your floor. We recommend sticking the strips together with Par-ky waterproof tape.

for use with

Pro 06 Lounge 06 Classic 20 Elegant 20 Classic 32 Swing 06



50 m²
(528 sq/ft)
or 20 m²
(215 sq/ft)
Rolls

Waterproof tape



The floor has to be protected against rising damp. To stick our quality underlays together, we strongly recommend using the tested waterproof tape from Par-ky. Only in this way can you protect the underside of your floor against dampness.



Smart tools for that **PERFECT** finish

Veneer skirting

1 skirting, 3 heights

The icing on the cake: once your Par-ky floor is installed, you can fit MATCHING WOOD SKIRTINGS for that finishing touch. Our trendy skirtings are 8 cm (3-1/8") high but they can easily be shortened to 6 cm (2-1/4") or even 2.5 cm (1"). Cut the skirtings to the desired height along the grooves. It's up to you to decide.

Veneer skirting dimensions:

2150 x 80 x 14 mm (84.6 x 3.2 x 9/16 inch)



Profiles

A. Wooden profile (domestic use)


1 profile, 3 applications

Everyone will appreciate our 3-in-1 profile that's available in the 21 Par-ky designs.

Really handy for:

1. End profile (jointless horizontal finish)
2. Reducer profile (to bridge the gap with a lower floor)
3. T-profile (expansion profile).

Dimensions profile: 2150 x 47 x 11 mm (84.6 x 1.9 x 7/16 inch)

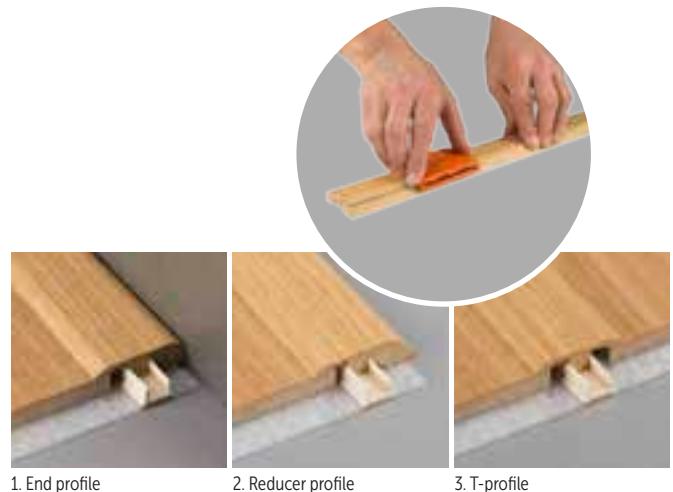

B. Aluminium profiles (intensive use)

2 profiles

Par-ky has developed aluminium profiles for each oak reference. These profiles are much stronger than the wooden variant and are therefore recommended for intensive use.

Dimensions profile:

- Connecting profile 900 x 38 mm (35.4 x 1.5 inch)
- End profile 2700 x 30 mm (106.3 x 1.2 inch)

Paintable skirting

New in our range is the white paintable skirting that provides a neat, modern look. What's more, it's also possible to paint the skirting along with the wall.

Paintable skirting dimensions:
2250 x 69 x 12 mm
(88.6 x 2.7 x 1/2 inch)



Keep your floor in good CONDITION

To clean your Par-ky floor without damaging the lacquer, we recommend to use our Par-ky cleaner. This was specially developed to remove dirt while protecting the wood.



Wood Floor Cleaner

1000 ml (33.8 oz.)

The cleaner must be diluted with water.
Clean using a damp cloth.



Ready to use Wood Floor Cleaner

500 ml spray (16.9 oz.)

Handy to use, you can apply this directly onto the floor or the mop.



Repair pens

Small scratches can easily be repaired. Boxes are available with 1 or 2 pens, depending on the shade of your Par-ky floor. After the repair, dirt can no longer get into the scratch.

The instructions for use are available at www.par-ky.com/en/Downloads.



Repair wax

A small hole, quickly fixed. Par-ky has developed a repair wax for deeper holes. This allows holes that extend through the varnish to be repaired, thereby protecting the floor against the ingress of moisture.

The repair wax kit contains 7 wax blocks, a melting knife and a spatula. The instructions can be found on the packaging or at www.par-ky.com/en/Downloads.



More extensive damage, no disaster

In case of larger damage, you can easily replace a floorboard in the middle of the floor with the Par-ky bulldog thanks to the Uniclic® joining system. Consult your dealer.

Instructions and a handy film clip can be found at www.par-ky.com/en/Downloads, click on Bulldog video and Bulldog instructions for more information.

		Pro 06		Lounge 06		Deluxe+ 06		
	TEST METHOD	brushed	sealed	brushed	sealed	brushed	sealed	
Wood veneer floor covering	EN14354/EN14352							
Domestic usage classification	EN685		Class 23		Class 23		Class 23	
Commercial usage classification	EN685		Class 31		Class 31		Class 31	
Warranty	DECOSPAN nv	15 years		20 years		15 years		20 years
CE certification	EN14342		EN14342:2013			EN14342:2013		
Dop Nr.			14001		14002		15001	
GENERAL PROPERTIES	Moisture content	EN322	≤6 %		≤6 %		≤6 %	
	Dimensions of floor boards	EN14354	1203 x 190 x 7,2 mm		1203 x 124 x 8,3 mm		1800 x 166 x 12 mm	
	Thickness of the top layer	EN14354	0.6 mm		0.6 mm		0.6 mm	
	Deviation of thickness	EN14354	≤0,5 mm		≤0,5 mm		≤0,5 mm	
	Deviation of squareness	EN324-2	≤0,2 mm		≤0,2 mm		≤0,2 mm	
	Cup in width direction	EN14354	≤0,2 %		≤0,2 %		≤0,2 %	
	Flatness deviation		4 %		4 %		3 %	
	Internal bond	EN319	>1,4 N/mm ²		>1,4 N/mm ²		>1,3 N/mm ²	
	Veneer glueing adhesion	EN204/205	≥1 N/mm ²		≥1 N/mm ²		≥1 N/mm ²	
	Mechanical connection system		Uniclic system		Uniclic system		Uniclic system	
	Opening between elements	EN14354	≤0,2 mm		≤0,2 mm		≤0,2 mm	
	Tensile strength on short end	ISO24334	500 kg/lm		550 kg/lm		625 kg/lm	
	Density	EN323/EN672	>900 kg/m ³		>900 kg/m ³		>850 kg/m ³	
	Weight/sqm		7 kg		8 kg		10 kg	
CLASSIFICATIONS PROPERTIES	Thickness distension	EN 13329 annex G	≤8 %		≤8 %		≤10 %	
	Resistance to indentation	EN 1534	≥20 N/mm ²		≥30 N/mm ²		≥20 N/mm ²	
	Resistance to abrasion	EN 14354//EN112,73.XX	>3000 rev.		>5000 rev.		>3000 rev.	
	Impact resistance	EN 438-2/1EC2		>1200 (EC2)			>1200 (EC2)	
	Adhesion of the lacquer	EN ISO 2409		class <2		class <2	class <2	
	Resistance to chemical agents	EN 423/part 2		grade 4*		grade 4*	grade 4*	
ADDITIONAL PROPERTIES	Appearance of the lacquer	EN 438/2-5	ok		ok		ok	
	Gloss	EN 2813	matt 10% (+/-5) satin 20% (+/-5)		matt 10% (+/-5) satin 20% (+/-5)		matt 10% (+/-5) satin 20% (+/-5)	
	Hardness of the lacquer	DIN 53154	3 Newton		3 Newton		3 Newton	
	Residual indentation	EN 433	<0,05 mm		<0,05 mm		<0,05 mm	
	Impact resistance acc. to Wegner	EN 438-2/11	>5 Newton		>8 Newton		>5 Newton	
	Elasticity of the lacquer	CEN/TC112 (Brinell)	2 Hb		2 Hb		2 Hb	
	Colour fastness	EN 105-B02	grade >6		grade >6		grade >6	
	Castor chair resistance	EN 425	no visible change		no visible change		no visible change	
	Burning cigarette	EN 438-2/30	Class 3**		Class 3**		Class 3**	
	Underfloor heating/cooling		ok		ok		ok	
	Thermal resistance	EN 12667	0,043 m ² K/W		0,0493 m ² K/W		0,0820 m ² K/W	
	Thermal conduction	EN 12667	0,230 W/mK		0,203 W/mK		0,122 W/mK	
	Step sound	NF S 31-074	class D (85 db)		class D (85 db)		class D (85 db)	
	Acoustic improvement	EN 140-8/EN717-2(Ln,w)	65 dB		65 dB		64 dB	
	Reduction of sound impact	EN 140-8/EN717-2 (ΔLw)	15 dB		15 dB		15 dB	
SAFETY PROPERTIES	Antistatic performance	EN 1815	< 2 kV (antistatic)		< 2 kV (antistatic)		< 2 kV (antistatic)	
	Biological durability	EN 335-1/EN335-2	Class 1		Class 1		Class 1	
	Well-managed forests		FSC certified (optional)		FSC certified (optional)		FSC certified (optional)	
	Resistance to termites		good		good		good	
	Resistance to bacteria		Ultrafresh		Ultrafresh		Ultrafresh	
	Recycling		ok		ok		ok	
	VOC loss	EN 664	<2,1 %		<2,1 %		<2,1 %	
	VOC loss	French legislation ISO16000	A		A		A	
	Formaldehyde emission	E1 (EN 717-1)	Class E1 (<0,13 ppm)		Class E1 (<0,13 ppm)		Class E1 (<0,13 ppm)	
	Formaldehyde emission	E1 (EN 717-2)	Class E1 (<3,5 mg/m ³ h)		Class E1 (<3,5 mg/m ³ h)		Class E1 (<3,5 mg/m ³ h)	
	Formaldehyde emission	ASTM E 1333-96	CARB 2		CARB 2		CARB 2	
	Exudation of plasticizers	EN 665	0 %		0 %		0 %	
	PCP (pentachlorophenol)	CEN/TR 14823	PCP free		PCP free		PCP free	
	Burning cigarette	EN 438-2/30	Class 3**		Class 3**		Class 3**	
	Fire reaction and smoke generation	EN 13501-1	Class Cfl s1 (On demand Bfl s1)		Class Bfl s1		Class Cfl s1 (On demand Bfl s1)	
	Slip resistance (dry conditions)	DIN 51131	Class R11 (average)		Class R11 (average)		Class R11 (average)	
	Slip resistance (wet conditions)	EN 1339 (pendule)	Class ≥15 (USRV)		Class ≥15 (USRV)		Class ≥15 (USRV)	

Classic 20	Elegant 20	Royal+ 20	Classic 32	Swing 06	Twist+ 06
brushed	brushed	brushed	brushed	brushed sealed	brushed sealed
Class 22	Class 22	Class 22	Class 23	Class 23	Class 23
Class 31	Class 31				
15 years	15 years	15 years	15 years	15 years 20 years	15 years 20 years
EN14342:2005+A1:2008	EN14342:2005+A1:2008	EN14342:2005+A1:2008	EN14342:2005+A1:2008	EN14342:2013	EN14342:2013
15010	15011	15012	15013	18001	14009
≤9 %	≤9 %	≤9 %	≤9 %	≤6 %	≤6 %
1185 x 150 x 10 mm	1935 x 150 x 10 mm	1935 x 194 x 12 mm	1184 x 148 x 14 mm	595 x 121 x 10 mm	868,7 x 124 x 12 mm
2 mm	2 mm	2 mm	3,2 mm	0,6 mm	0,6 mm
≤0,5 mm	≤0,5 mm				
≤0,2 mm	≤0,2 mm				
≤1 %	≤1 %	≤1 %	≤1 %	≤0,2 %	≤0,2 %
4 %	4 %	4 %	4 %	3 %	3 %
>1,3 N/mm ²	>1,3 N/mm ²				
≥1 N/mm ²	≥1 N/mm ²				
Uniclic system	Uniclic system	Uniclic system	Uniclic system	Unifit X system	Uniclic system
≤0,2 mm	≤0,2 mm				
>850 kg/m ³	>850 kg/m ³				
8 kg	8 kg	10 kg	12 kg	7 kg	10 kg
≤8 %	≤8 %	≤8 %	≤8 %	≤10 %	≤10 %
≥20 N/mm ²	≥20 N/mm ²	≥20 N/mm ²	≥20 N/mm ²	≥20 N/mm ² ≥30 N/mm ²	≥20 N/mm ² ≥30 N/mm ²
>3000 rev.	>3000 rev.	>3000 rev.	>3000 rev.	>3000 rev. >5000 rev.	>3000 rev. >5000 rev.
class <2	class <2				
grade 4*	grade 4*				
ok	ok	ok	ok	ok	ok
matt 10% (+/-5)	matt 10% (+/-5)	matt 10% (+/-5)	matt 10% (+/-5)	matt 10% (+/-5) satin 20% (+/-5)	matt 10% (+/-5) satin 20% (+/-5)
2 Newton	2 Newton	2 Newton	2 Newton	3 Newton	3 Newton
<0,05 mm	<0,05 mm				
>2,5 Newton	>2,5 Newton	>2,5 Newton	>2,5 Newton	>5 Newton >8 Newton	>5 Newton >8 Newton
2 Hb	2 Hb				
grade >6	grade >6				
Class 3**	Class 3**				
ok but glued	ok but glued	ok but glued	ok but glued	ok	ok
0,07 m ² K/W	0,07 m ² K/W	0,0999 m ² K/W	0,08 m ² K/W	0,07 m ² K/W	0,0820 m ² K/W
0,15 W/mK	0,15 W/mK	0,12 W/mK	0,18 W/mK	0,15 W/mK	0,122 W/mK
class D (85 dB)				class D (85 dB)	class D (85 dB)
				65 dB	64 dB
				15 dB	15 dB
< 2 kV (antistatic)	< 2 kV (antistatic)				
Class 1	Class 1				
FSC certified (optional)	FSC certified (optional)				
good	good	good	good	good	good
Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh	Ultrafresh
ok	ok	ok	ok	ok	ok
<2,1 %	<2,1 %	<2,1 %	<2,1 %	<2,1 %	<2,1 %
A+	A+	A+	A+	A	A
Class E1 (<0,13 ppm)	Class E1 (<0,13 ppm)				
Class E1 (<3,5 mg/m ³ h)	Class E1 (<3,5 mg/m ³ h)				
CARB 2				CARB 2	CARB 2
0 %				0 %	0 %
PCP free	PCP free				
Class 3**	Class 3**				
Class Dfl s1	Class Dfl s1	Class Dfl s1	Class Dfl s1	Class Cfl s1 (On demand Bfl s1)	Class Cfl s1 (On demand Bfl s1)
Class R11 (average)	Class R11 (average)				
Class >15 (USRV)	Class >15 (USRV)				

* 1=surface destruction, 5=no visible changes / ** class 3 = moderate change of gloss level and/or moderate brown spot

We'll help you out in making the right CHOICE.

Would you like to see the quality of Par-ky with your own eyes and feel the natural warmth of the wood? Are you unable to choose between the different varieties of wood and colours? Then we'll happily help you with your choice! Our distributors have all the necessary knowledge and their stores are equipped with a display containing up-to-date samples. This will make choosing your dream floor quick and easy.

You can find your nearest store at
www.par-ky.com/en/Dealers or by scanning this code with your smartphone.



Decospan nv
Industriezone Grensland
Lageweg 33
8930 Menen - Belgium
tel +32 56 52 88 49
info@par-ky.com

www.par-ky.com



© Decospan 2018 - Nothing from this brochure may be reproduced without written prior permission.

Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries.

Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

